
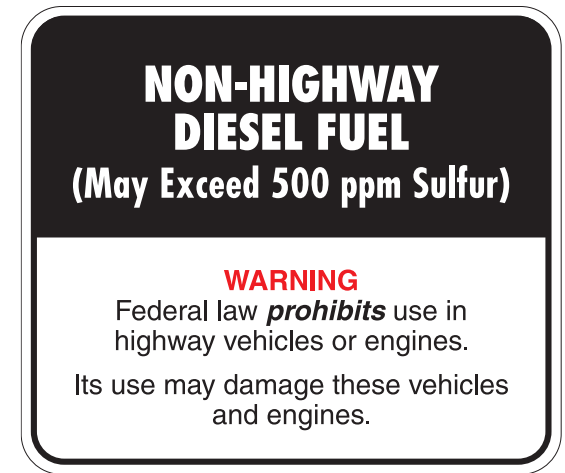
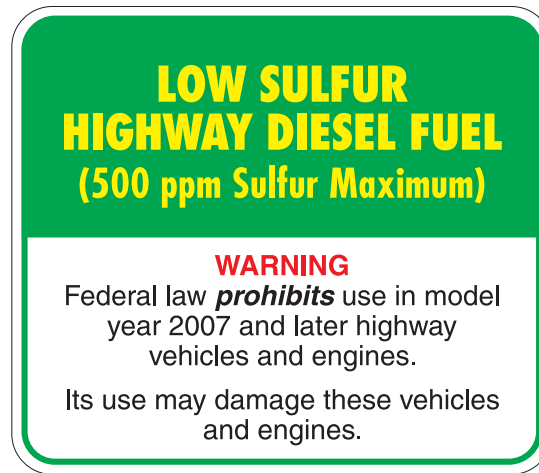


API Suggested Diesel Pump Labels

Compliant with EPA 40 CFR 80.570

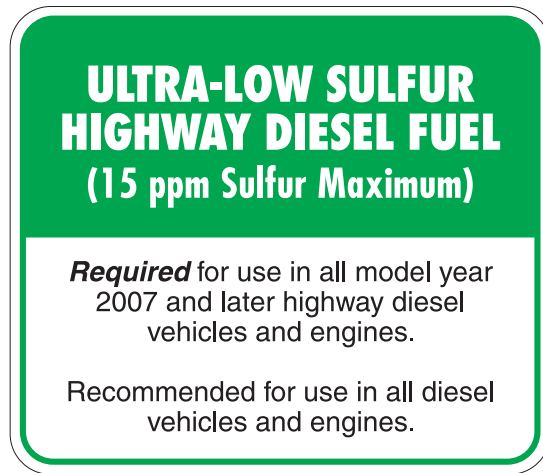


- Titles of all labels (e.g., Low Sulfur Highway Diesel Fuel) are in 24-point type, Sulfur Level Cap Designations (e.g., [500 ppm Sulfur Maximum]) are in 20-point type, and all other required language is in 14-point type as approved by the EPA.
- Green is chosen as the background for the first two labels because of its strong association with diesel in the gasoline service station network.
- Labels shall be on the upper two-thirds of the pump in a location where they are clearly visible.
- Pumps must be labeled by June 1, 2006.

API Suggested Kerosene Pump Labels

In accordance with “EPA Questions and Answers on the Clean Diesel Fuel Rules published July 2006”


For clear, taxed
Kerosene

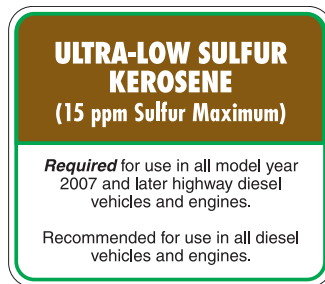


For clear, untaxed
Kerosene at blocked
pumps




For clear, taxed
Kerosene



For clear, untaxed
Kerosene at blocked
pumps

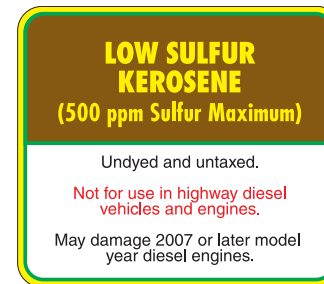

Alternate labeling
language for
40 CFR 80.570(c)



- Titles of all labels (e.g., Low Sulfur Kerosene) are in 24-point type, Sulfur Level Cap Designations (e.g., [500 ppm Sulfur Maximum]) are in 20-point type, and all other required language is in 14-point type as approved by the EPA.
- Labels shall be on the upper two-thirds of the pump in a location where they are clearly visible.